

General Specifications - Outdoor models

PVI-10.0-0 OUTD-AU / PVI-10.0-OUTD-S-AU / PVI-10.0-OUTD-FS-AU
 PVI-12.5-OUTD-AU / PVI-12.5-OUTD-S-AU / PVI-12.5-OUTD-FS-AU

AURORA BENEFITS

- Dual independent input sections to offer the max configuration flexibility of the installation with 3 strings for each MPPT
- Transformerless operation for highest efficiency: up to 97,7%; Euro: 97,13% (10kW) ; 97,25 (12.5kW)
- True 3ph bridge topology for DC/AC output converter
- Wide MPPT input voltage range: 200-850Vdc
- Flat efficiency curve: to ensure consistent and stable performance across the whole input voltage and output power range
- Efficiency peaks at the middle of the input voltage and output power range to ensure better performance under real operating conditions
- Very fast and accurate dual MPPT algorithm (response time: 1sec; accuracy: 99,8%)
- Very low sensitivity to grid disturbances to avoid undesired disconnection from the grid
- Wide operating temperature range -25°/+60°C. Maximum output power guaranteed for ambient temperatures up to 50°C, free convection cooling (no ventilation)
- PVI-XX.X-OUTD-FS variants include DC switch and fuses (see block diagram)
- LCD Display on the front to monitor the main parameters
- Anti-islanding Protection
- Integrated RS-485
- Standard DC connection with MultiContact MC4 connector
- Reverse polarity protection minimizes chance of damage due to mis-wiring




Electrolyte - Free
The string inverter without electrolytic capacitors


STANDARDS AND CODES

Aurora inverters comply with standards set for grid-tied operation, safety and electromagnetic compatibility including: AS/NZS 60950.1:2003 A1-3, AS/NZS 3100:2009, AS4777.2 and AS4777.3, VDE0126, CEI 11-20 IV ed, DK5940, IEC 61683, IEC 61727, EN50081, EN50082, EN61000, CE certification, El Real Decreto RD1663/2000 de España.


Block Diagram and typical efficiency

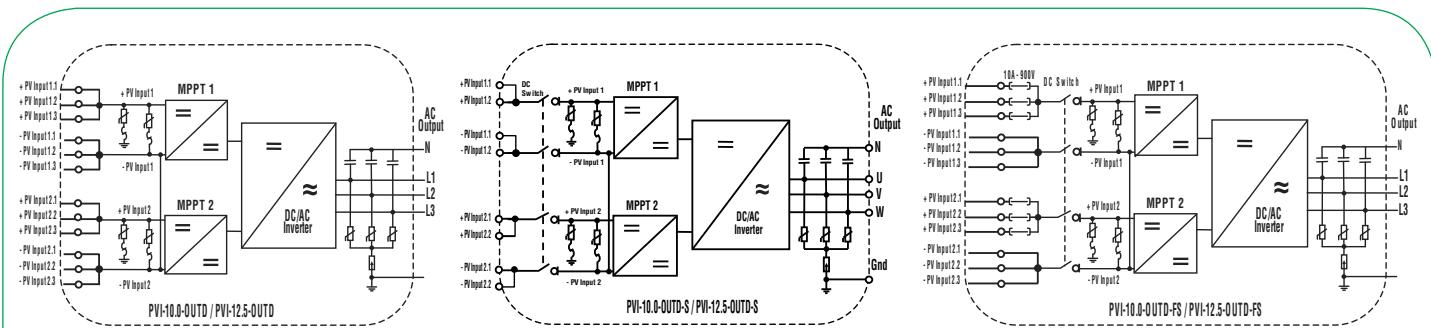

PVI-10.0-OUTD Efficiency

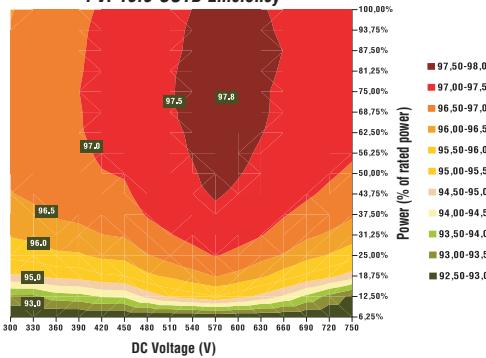

PVI-12.5-OUTD Efficiency

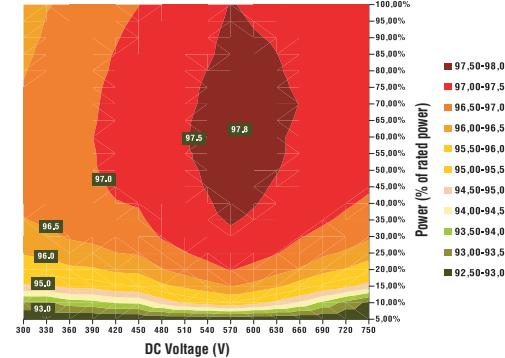

CHARACTERISTICS		PVI-10.0-OUTD	PVI-12.5-OUTD
INPUT PARAMETERS			
Nominal DC Power [kW]		10,3	12,8
Max. Recommended DC Power [kW]		11,4	14,3
Operating Input Voltage Range [V]		0,7xVstart - 850 (580 nominal)	
Full Power MPPT input voltage range (symmetrical load) [V]		300-750	360-750
Full asymmetrical load input voltage range [V]		360-750 (@ 6,5kW) / 216-750 (@ 3,9kW)	445-750 (@ 8kW) / 278-750 (@ 5kW)
Absolute Max. Input Voltage [V]		900	
Activation voltage "Vstart" [V]		360 nominal (adjustable within the range 250Vdc-500Vdc, independently/each input)	
No of independent MPPT trackers		2	
Max. Input Power, each MPPT [kW]		6,5	8
No. of DC Inputs		4/6 (2/3 each MPPT, optionally fused)	
Max. DC Current, each MPPT [A]		18 (22 shortcircuit)	
DC Connection		8/12 x MultiContact Ø 4mm (4/6 male - positive input + 4/6 female - negative input) Mating cable connector included Conductor cross section: 4-6mm ² /AWG12-10 - Cable Ø w/insulator: 3-6mm	
INPUT PROTECTION			
Reverse polarity protection		Yes	
Fuse rating, each input (-FS suffix versions only)		10Adc / 900Vdc	
DC side varistors		4 (2 each MPPT), thermally protected	
PV array Insulation Control		according to VDE0126-1-1	
DC Switch (-S/-FS suffix versions only)		Integrated (Rating: 1000Vdc / 25Adc)	
OUTPUT PARAMETERS			
Nominal AC Power [up to 50°C, kW]		10	12,5
Max. AC Power [kW]		11	13,8
AC Grid Connection		3 phase 400Vac 50Hz with or without neutral (3 or 4 wires network) + PE	
Nominal AC Voltage [V]		3x400Vac	
Maximum AC Voltage Range [V]		311-456Vac (may be limited in acc. to country-specific requirements)	
Nominal AC Frequency [Hz]		50	
Max. AC Line Current [A]		16,6A per phase (19A short circuit)	20A per phase (22A short circuit)
AC Connection		Screw terminal block Conductor Cross Section: Solid: 0,5-16mm ² / Stranded: 0,5-10mm ² / AWG20-6 Cable Gland: M40 - Cable Ø: 19-28mm	
Line Power Factor		1	
AC Current Distortion [THD%]		<2% at rated power with sine wave voltage	
OUTPUT PROTECTION			
AC side varistors		3, star connected to common point, plus gas arrester to ground	
Ground fault protection (AC + DC leakage current)		according to VDE0126-1-1	
CONVERSION EFFICIENCY			
Max. Efficiency		97,70%	
Euro Efficiency		97,13%	97,25%
ENVIRONMENTAL PARAMETERS			
Cooling		Natural cooling	
Ambient Temp. Range [°C]		-20 / +60 (output power derating above 50°C)	
Operatng Altitude [m]		2000	
Acoustical Noise [dBA]		<50 @1mt	
Environmental IP Rating		IP65	
Relative Humidity		0-100% condensing	
MECHANICAL			
Dimensions [H x W x D]		650 x 650 x 200	
Weight [kg]		38	
OTHER			
Stand-By Consumption [W]		10	
Feed In Power Threshold [W]		30W	
Night Time consumption [W]		<2	
Isolation		No isolation, Transformer-less	
Display		YES (Alphanumeric 2 lines)	
Communication		RS485 (Screw terminal block - Conductor cross section: 0,08-1,5mm ² /AWG28-16)	
AVAILABLE PRODUCT VARIANTS			
Standard - no options		PVI-10.0-OUTD	PVI-12.5-OUTD
With DC switch		PVI-10.0-OUTD-S	PVI-12.5-OUTD-S
With DC switch and protection fuse/each input		PVI-10.0-OUTD-FS	PVI-12.5-OUTD-FS

MODEL SUMMARY

MODEL NUMBER	POWER
PVI-10.0-OUTD/-S/-FS	10.000W
PVI-12.5-OUTD/-S/-FS	12.500W