





Features & Benefits

- Advanced wrap around micro channel heating technology for uniform and faster water heating
- Suitable for cold climates with an operating range from -6°C to +43°C⁶
- Suitable for harsh water conditions⁷
- 2.4 kW back-up element
- User-friendly touch screen LED display
- Eligible for STCs⁵
- Manufactured in Australia
- 7 year cylinder warranty¹

350mm minimum distance from air inlet to wall or obstruction measured horizontally along wall 900mm minimum recommended for service

1000mm minimum distance from air outlet to wall or obstruction measured horizontally along wall 900mm minimum recommended for service

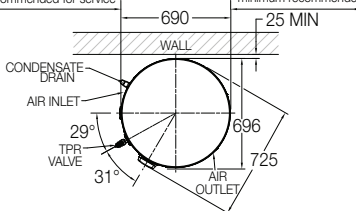

MODEL	551E280
Storage Capacity (L)	280
Element Rating (kW)	2.4
Relief Valve Pressure (kPa)	1000
Expansion Control Valve (kPa)	850
Max Water Supply Pressure:	
with ECV (kPa)	680
without ECV (kPa)	800
Water Connections	Rp 3/4
Approx. Weight (Empty) kg	135



Tap QR code for
installation
instructions

