

# PID ZERO

## 72 CELL SERIES



### KEY FEATURES

---

#### 0 PID Risk

With new encapsulant

#### 10 years

Material & workmanship warranty

#### 25 years


Linear power output warranty

- More reliable than ordinary modules
- Robust design: Certified to withstand up to 2400 Pa wind load and up to 5400 Pa snow load
- More power output than ordinary modules within 25 years
- Four busbar cell: Improve the efficiency of modules

### QUALITY WARRANTY

---

TALESUN guarantees that defects will not appear in materials and workmanship defined by IEC61215, IEC61730 and UL1703 under normal installation, use and maintenance as specified in Talesun's installation manual for 10 years from the warranty starting date.



### ABOUT TALESUN

---

Zhongli Talesun Solar Co., Ltd. is one of the world's largest integrated PV manufacturers. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. With over 3.5 GW of modules installed globally, we are a leading solar energy company built upon proven product reliability and sustainable performance.

### PERFORMANCE WARRANTY

---

#### Monocrystalline Solar Cell Modules

- a) During the first year, TALESUN guarantees the nominal power output of the product will be no less than 97% of the labeled power output.
- b) From year 2 to year 24, the nominal power decline will be no more than 0.7% in each year; by the end of year 25, the nominal power output will be no less than 80% of the labeled power output.

# ELECTRICAL PARAMETERS

Model	PID ZERO TP672M			
Maximum Power (Pmax/W)	325	330	335	340
Operating Voltage (Vmpp/V)	37.5	37.9	38.2	38.6
Operating Current (Impp/A)	8.67	8.72	8.77	8.82
Open-Circuit Voltage (Voc/V)	46.3	46.5	46.7	47.0
Short-Circuit Current (Isc/A)	9.18	9.24	9.30	9.37
Module Efficiency $\eta_m(\%)$	16.7	17.0	17.3	17.5
Power Tolerance	0-+3%			
Temperature Coefficient	Pmax	-0.39%/C		
	Voc	-0.30%/C		
	Isc	+0.05%/C		
Noct	45±2 C			

\* STC: 1000w/ m<sup>2</sup>, 25 C, AM 1.5

# OTHER PARAMETERS

Cell Type	Mono Crystalline
Cell Dimensions	156*156mm(6inch)
Cell Arrangement	72(6*12)
Weight	22kg(48.5lbs)
Module Dimensions	1960*990*40mm(77.2*39.0*1.6inch)
Cable Length	900mm(35.4inch)
Cable Cross Section Size	4mm <sup>2</sup> (0.006sq.in)
Front Glass	3.2mm High Transmission, Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	26pcs/Pallet, 572pcs/40hq
Packing Configuration (2)	26pcs+5pcs/Pallet, 627pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP65/IP67

# OPERATING CONDITIONS



Maximum System Voltage	1000V/DC(IEC)
Operating Temp.	-40 C -+85 C
Maximum Series Fuse	15A
Static Loading	5400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	MC4 Compatible

**ZHONGLI TALESUN SOLAR CO.,LTD.**

Email: sales@talesun.com Web: www.talesun.com Tel: + 86 400 885 1098

# I-V CURVE

TP672M Pm(W)325

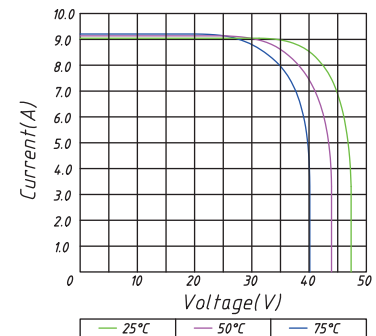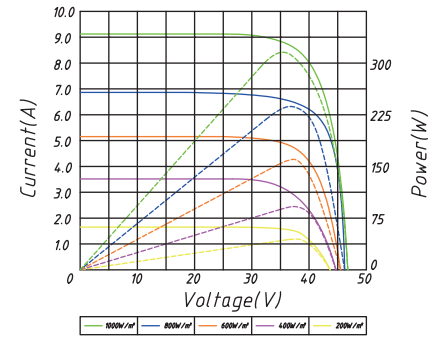

# TECHNICAL DRAWINGS

