

# ZXM6-H132 Series

Znshinesolar 5BB **HALF-CELL**  
Mono PV Module



132

Mono **Poly** Solutions

350W | 355W | 360W | 365W | 370W



Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-H132 monocrystalline modules by ZNSHINE SOLAR represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy whilst reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-H132 monocrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

**12 years product warranty for general application**

**15 years product warranty for Rooftop PV system**

**25 years output warranty/0.55% linear degradation p.a.**

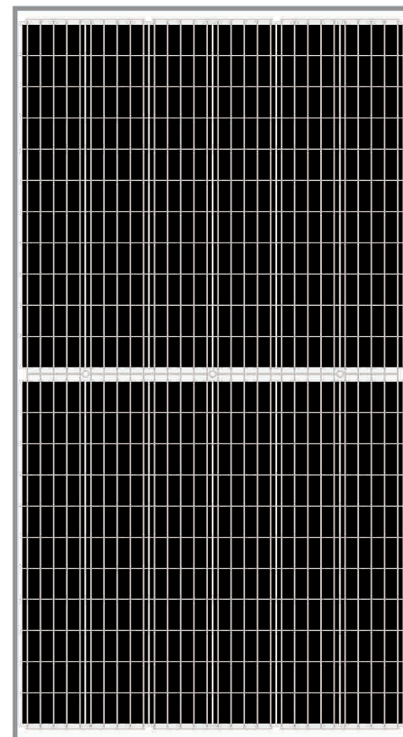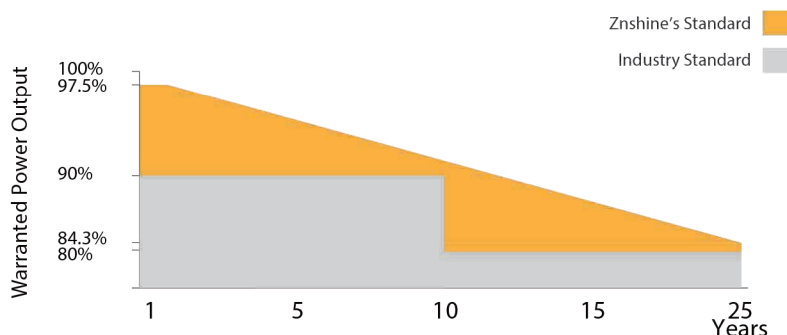

## More power output

Module RS decreases, FF (fill factor) increases, power gain is stable above 2%, and can be increased by 5~10W



## Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



## Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



### ELECTRICAL PROPERTIES | STC\*

Module Type	ZXM6-H132 -350/M	ZXM6-H132 -355/M	ZXM6-H132 -360/M	ZXM6-H132 -365/M	ZXM6-H132 -370/M
Nominal Power Watt Pmax(W)	350	355	360	365	370
Power Output Tolerance Pmax(%)	350±3%	355±3%	360±3%	365±3%	370±3%
Maximum Power Voltage Vmp(V)	36.7	36.9	37.1	37.2	37.4
Maximum Power Current Imp(A)	9.54	9.63	9.71	9.82	9.90
Open Circuit Voltage Voc(V)	44.5±3%	44.7±3%	44.9±3%	45.1±3%	45.3±3%
Short Circuit Current Isc(A)	10.06±3%	10.16±3%	10.24±3%	10.32±3%	10.40±3%
Module Efficiency (%)	18.78	19.05	19.32	19.58	19.85

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5

\*The data above is for reference only and the actual data is in accordance with the practical testing

### ELECTRICAL PROPERTIES | NOCT\*

Maximum Power Pmax(Wp)	259.0	263.0	266.0	270.0	271.5
Maximum Power Voltage Vmpp(V)	34.0	34.2	34.4	34.6	34.9
Maximum Power Current Imp(A)	7.62	7.69	7.75	7.82	7.79
Open Circuit Voltage Voc(V)	41.3	41.5	41.6	41.8	41.9
Short Circuit Current Isc(A)	8.13	8.21	8.27	8.34	8.40

\*NOCT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

\*The data above is for reference only and the actual data is in accordance with the practical testing

### TEMPERATURE RATINGS


NOCT	45°C ±2°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

\*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

### WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C ~ +85°C
Maximum series fuse	15 A
Maximum load front/back	3600/1600 with safety factor 1.5

### DIMENSION OF THE PV MODULE ( mm )

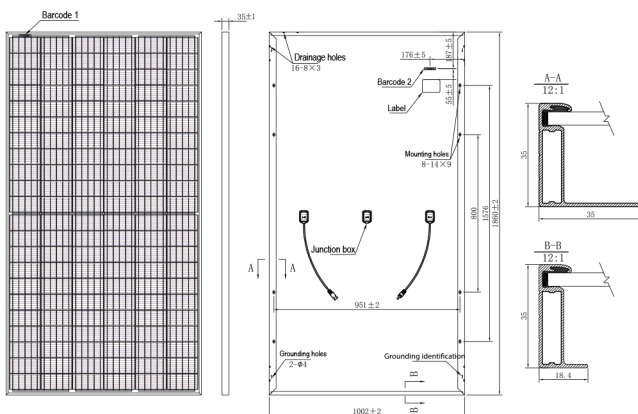

### MECHANICAL DATA

Solar cells	Mono 158.75*79.375mm
Cells orientation	132 ( 6×22 )
Module dimension	1860×1002×35 mm(With Frame)
Weight	21kg
Glass	High transparency, low iron, tempered Glass 3.2mm (AR-coating)
Junction box	IP 68 , 3 diodes
Cables	H1Z2Z2-K 1×4,0mm <sup>2</sup>
Connectors	LJQ-1 Taizhou Jinxiu Electrical Science & Technology Co Ltd manufactured in China

### PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	30
Piece/Container	720

### I-V CURVES OF THE PV MODULE

