

# ZXM6-NHLDD144 Series

Znshinesolar 9BB **HALF-CELL** Bifacial Light-Weight Double Glass Mono PV Module



144

**Mono** Poly Solutions

390W | 395W | 400W | 405W | 410W | 415W



Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NHLDD144 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-NHLDD144 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product.

**12 years product warranty for general double glass modules**

**15 years product warranty only for Residential Rooftop PV system**

**30 years output warranty/0.5% Annual Degradation over 30 years**

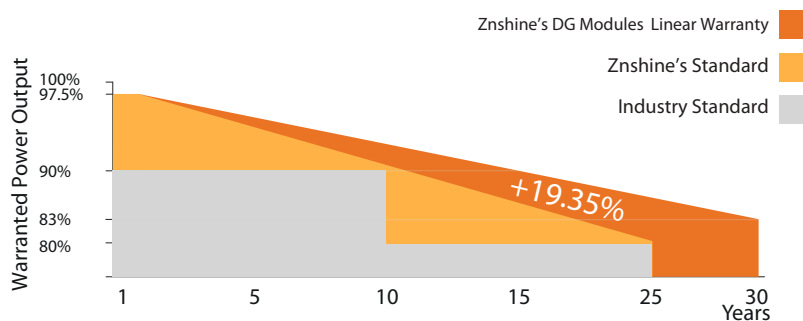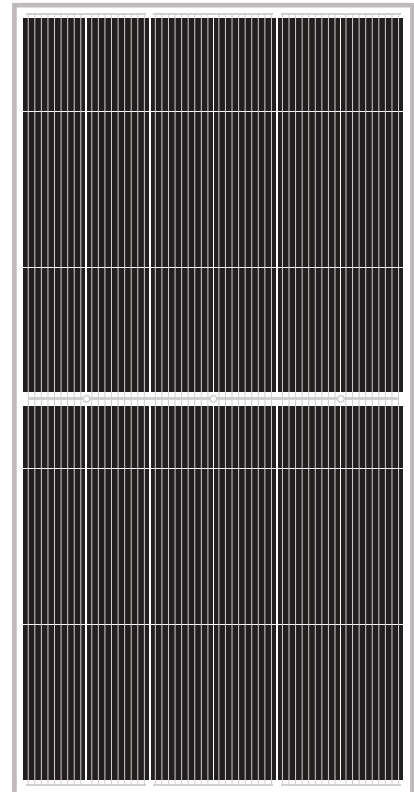

**9 Busbar Solar Cell**  
 No power loss thanks to improved temperature co-efficient caused by 9 busbar solar cell

**Better Weak Illumination Response**  
 Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings

**Easy to install**  
 The module is very light in weight so the installation is easier and transport costs are lower



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

ELECTRICAL PROPERTIES | STC\*

Module Type	ZXM6-NHLDD144 -390/M	ZXM6-NHLDD144 -395/M	ZXM6-NHLDD144 -400/M	ZXM6-NHLDD144 -405/M	ZXM6-NHLDD144 -410/M	ZXM6-NHLDD144 -415/M
Nominal Power Watt Pmax(W)	390	395	400	405	410	415
Power Output Tolerance Pmax(%)	390±3%	395±3%	400±3%	405±3%	410±3%	415±3%
Maximum Power Voltage Vmp(V)	40.5	40.7	40.9	41.1	41.3	41.5
Maximum Power Current Imp(A)	9.63	9.71	9.78	9.86	9.93	10.00
Open Circuit Voltage Voc(V)	48.6±3%	48.8±3%	49.0±3%	49.2±3%	49.4±3%	49.6±3%
Short Circuit Current Isc(A)	10.15±3%	10.23±3%	10.29±3%	10.35±3%	10.41±3%	10.48±3%
Module Efficiency (%)	19.23	19.48	19.72	19.97	20.22	20.46

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

ELECTRICAL PROPERTIES | NOCT\*

Maximum Power Pmax(Wp)	290.0	293.8	297.3	301.0	304.7	307.9
Maximum Power Voltage Vmpp(V)	37.6	37.8	38.0	38.3	38.5	38.6
Maximum Power Current Impp(A)	7.72	7.78	7.82	7.87	7.92	7.97
Open Circuit Voltage Voc(V)	45.2	45.4	45.6	45.8	45.9	46.0
Short Circuit Current Isc(A)	8.20	8.26	8.31	8.36	8.41	8.45

\*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

Electrical characteristics with 25% rear side power gain

Front power Pmax/W	390	395	400	405	410	415
Total power Pmax/W	488	494	500	506	513	519
Vmp/V(Total)	40.6	40.8	41.0	41.2	41.4	41.6
Imp/A(Total)	12.02	12.11	12.20	12.29	12.40	12.48
Voc/V(Total)	48.7	48.9	49.1	49.3	49.5	49.7
Isc/A(Total)	12.54	12.63	12.71	12.78	12.88	12.96

TEMPERATURE RATINGS

NOCT	44°C ±3°C
Temperature coefficient of Pmax	-0.36%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C
Refer.Bifacial Factor	70±5%

\*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	20 A
Maximum load front/back	3600/1600 with safety factor 1.5


MECHANICAL DATA

Solar cells	Mono 158.75*79.375mm
Cells orientation	144 (6×24)
Module dimension	2024×1002×30 mm(With Frame)
Weight	26.5 kg
Glass	2.0mm+2.0mm heat strengthened glass
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm <sup>2</sup>
Connectors	LJQ-3 Taizhou jinxiu Electrical Science & Technology Co., Ltd.
	manufactured in China

PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	36
Piece/Container	792

DIMENSION OF THE PV MODULE (mm)

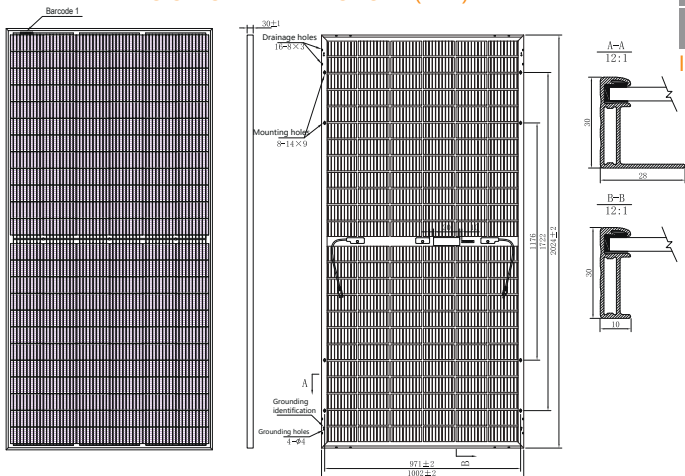

I-V CURVES OF THE PV MODULE

